



# The Meridian Door Cover

**TO AVOID PERSONAL INJURY DO NOT REMOVE OR REPLACE COVER WHEN PELLET STOVE IS HOT!**

## TOOLS REQUIRED:

- $1\frac{1}{32}$ " socket or wrench

## REMOVAL OF DOOR COVER:

When stove is off and cool, open the door. Remove the four #8 hex nuts around the inside of the glass retainer shown in Figure 1.


Remove door cover from door by gently sliding the studs out of the holes. If it is difficult to remove the cover, the glass retainer may be pinching the threads on the studs. Slightly loosen the four screws (by each of the studs).

## REPLACEMENT OF DOOR COVER:

Slide new door cover into place and hand tighten the four #8 hex nuts around the inside of the glass retainer. Ensure the four screws are also tight and close door.

## CLEANING THE DOOR COVER:

Painted surfaces should be wiped with a damp cloth periodically. It is important to note that fingerprints and other marks can leave a permanent stain on plated finishes. To avoid this, give the door a quick wipe with denatured alcohol on a soft cloth BEFORE lighting the stove. Never clean surfaces when hot. Do not use other cleaners or abrasives as they may leave a residue or scratches, which can become permanently etched into the surface.

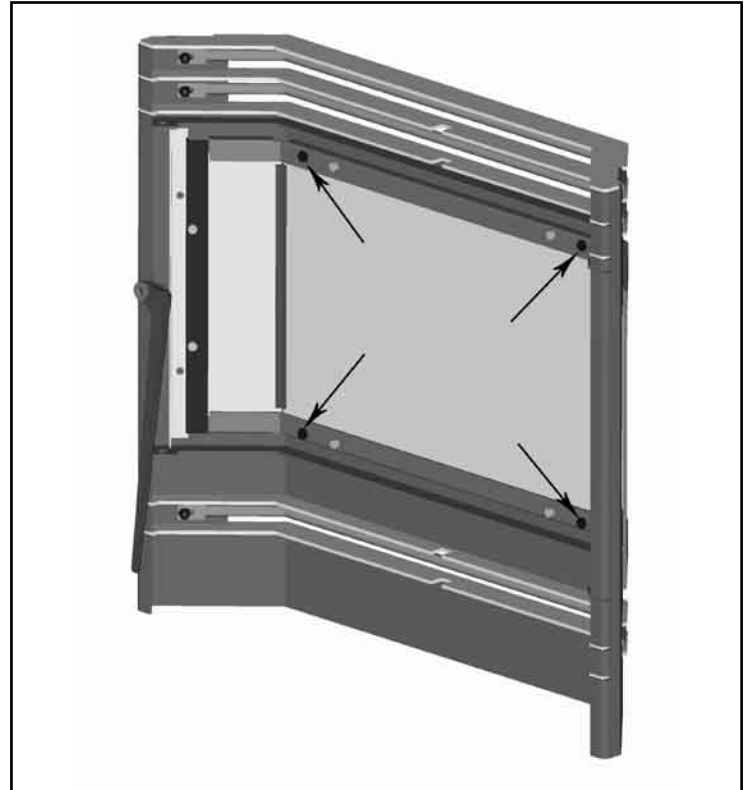

**Figure 1: Inner side of Meridian door.**

| Part Number | Trim                               |
|-------------|------------------------------------|
| 50-623      | Meridian Pewter Door Cover         |
| 50-624      | Meridian Gold Door Cover           |
| 50-625      | Meridian Antique Copper Door Cover |

MANUFACTURED BY:  
SHERWOOD INDUSTRIES LTD.  
6782 OLDFIELD RD. SAANICHTON, BC, CANADA V8M 2A3  
[www.envirofire.biz](http://www.envirofire.biz)  
July 22, 2003  
C-10053